



4G Camera user Manual

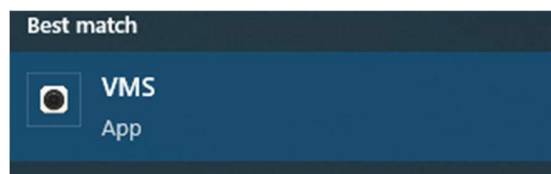


This is Our VMS

Open VMS

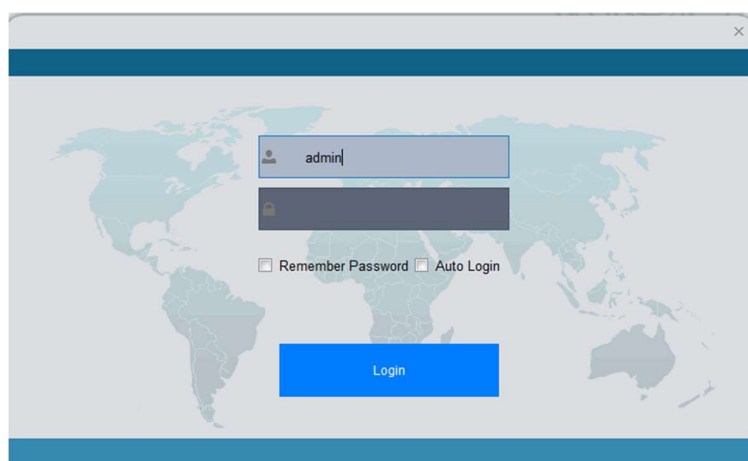

Enter User id and Password then click on login

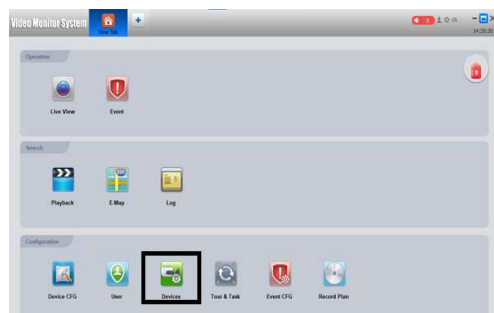

This is the main interface of Sparsh VMS, Click on Devices


If the camera directly locally connected with help of LAN Cable.

Sahasra Electronics (Rwanda) Pvt. Ltd.


C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820


E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw

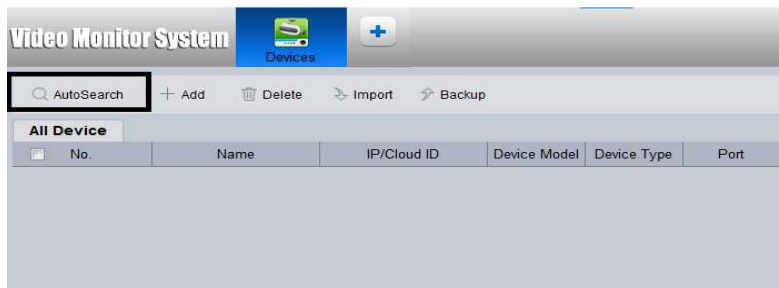

Click on Auto search.

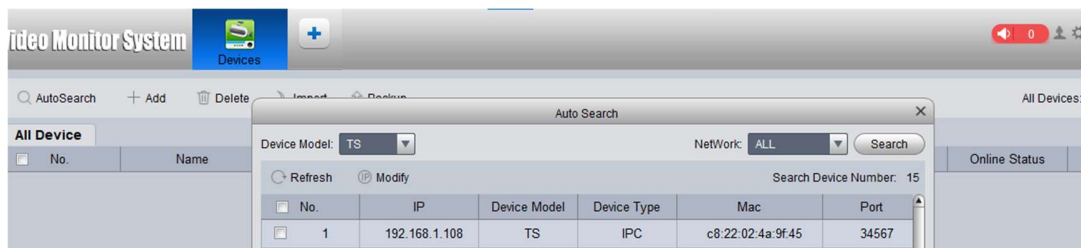


After Auto search the cameras will show

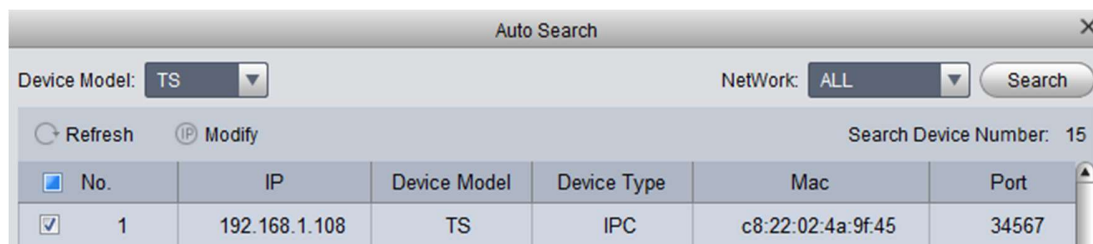

Select camera IP

And click on add

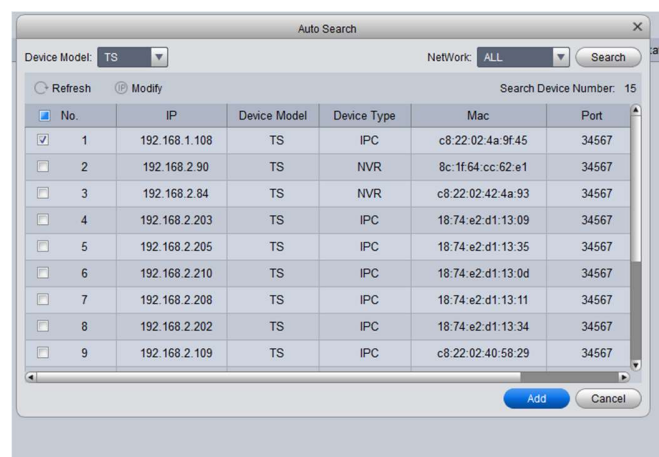


Sahasra Electronics (Rwanda) Pvt. Ltd.

C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820

E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw

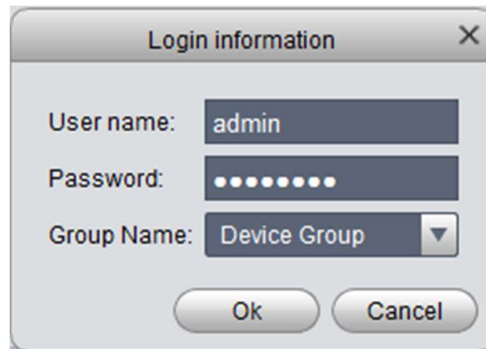

Login information


User name:

Password:


Group Name:

Ok Cancel


Enter user id & Password of the camera

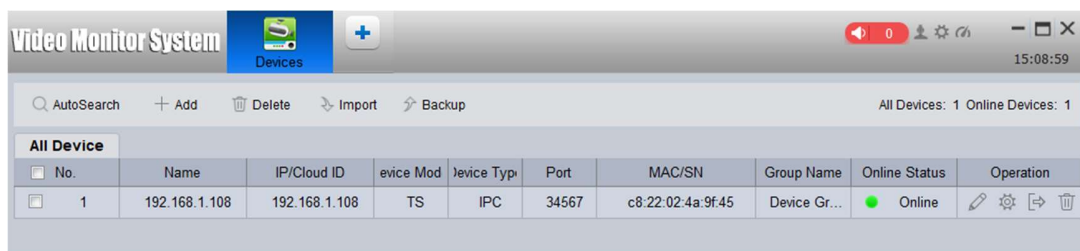

After this you will see the camera is online

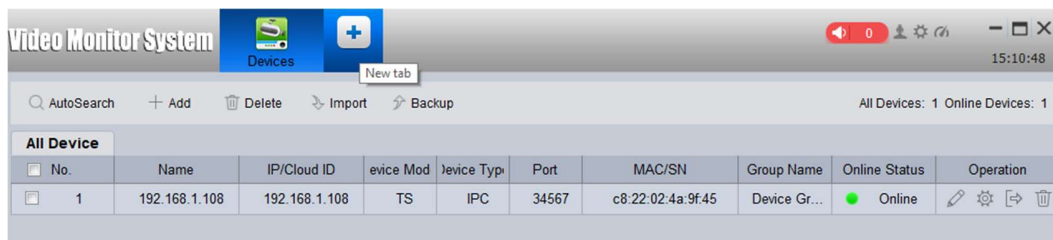

Click on plus icon

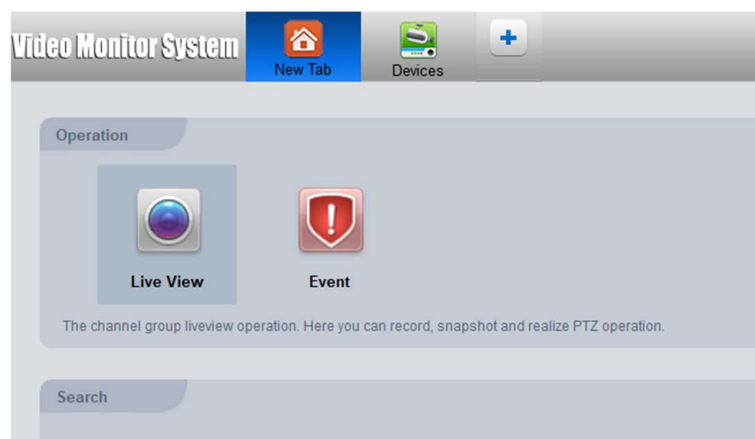


Click on live View

Sahasra Electronics (Rwanda) Pvt. Ltd.

C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820


E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw

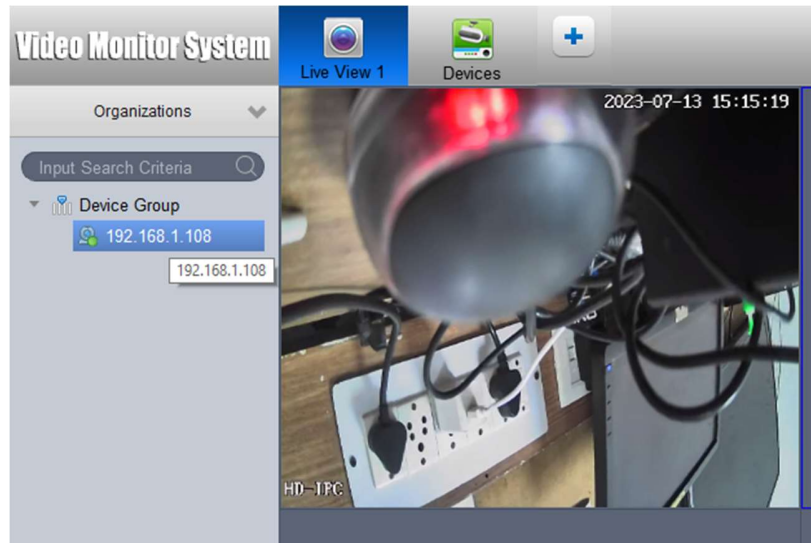

Double click on camera IP, if the camera is online then camera will come live, & then you can see the live video.

How to add camera using Serial Number on VMS

First open the camera using its IP in Browser

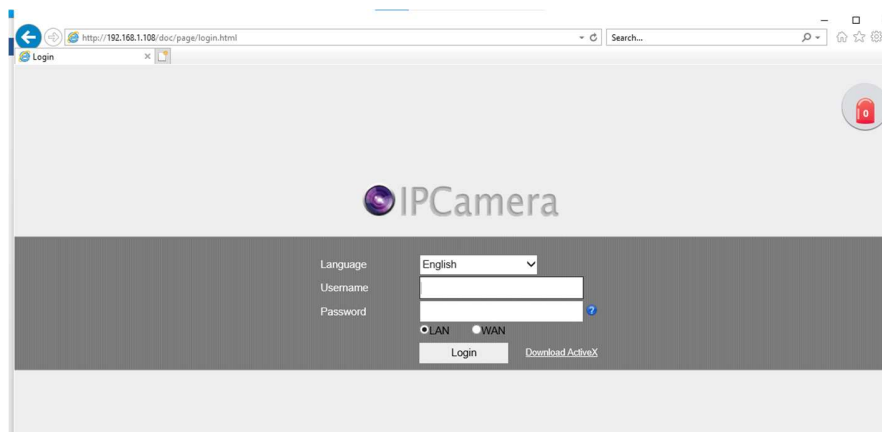

NOTE: - You have to insert sim card into the camera & Restart camera once.

Enter User id & Password of camera & Click on Login



Sahasra Electronics (Rwanda) Pvt. Ltd.

C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820

E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw

Click on Config.



Local Config
Encode
NetWork
Net Service
Record
Alarm
System Config
System Info

Email RTMP DDNS Cloud Storage RTSP 4G FTP WiFi UPnP P2P IP Filter

Enable ☒

Device ID rjph07iv95j8


Service Address www.topscloud.net

Port 5800

Save

Go to network then net services then P2P

& Copy Device id

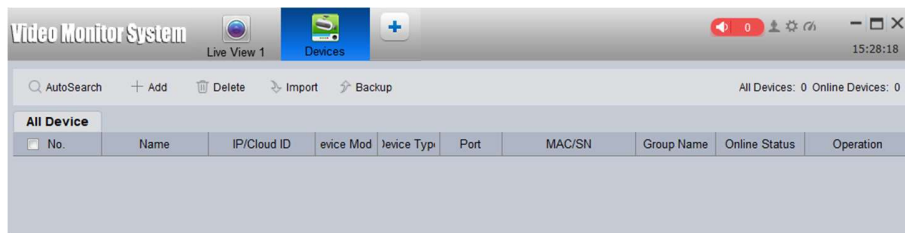


Video Monitor System

Live View 1 Devices

AutoSearch + Add Delete Import Backup All Devices: 0 Online Devices: 0

No.	Name	IP/Cloud ID	Device Mod	Device Type	Port	MAC/SN	Group Name	Online Status	Operation
All Device									

Then again open the VMS, & go to the devices

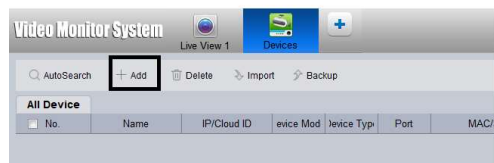


Video Monitor System

Live View 1 Devices

AutoSearch + Add Delete Import Backup All Devices: 0 Online Devices: 0

No.	Name	IP/Cloud ID	Device Mod	Device Type	Port	MAC/SN	Group Name	Online Status	Operation
All Device									

Click on Add.

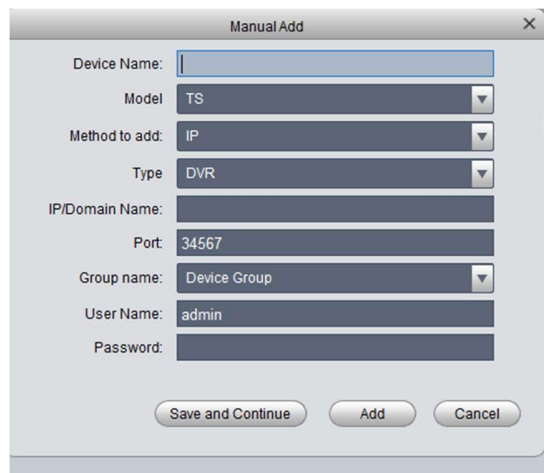

Manual Add

Device Name:

Model TS

Method to add: IP

Type DVR

IP/Domain Name:

Port: 34567

Group name: Device Group

User Name: admin

Password:

Save and Continue Add Cancel


Sahasra Electronics (Rwanda) Pvt. Ltd.

C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820


E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw

Enter Device Name (Anything)

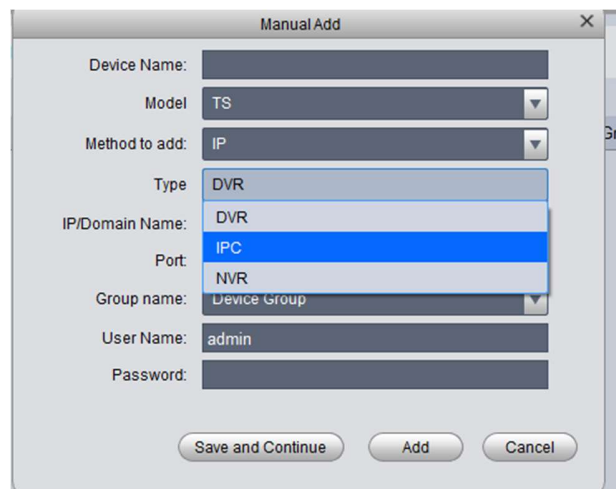

A screenshot of a 'Manual Add' dialog box. It contains several input fields and dropdown menus. The 'Device Name' field is empty. The 'Model' dropdown is set to 'TS'. The 'Method to add' dropdown is set to 'IP'. The 'Type' dropdown is open, showing options 'DVR', 'IPC', and 'NVR', with 'IPC' selected. The 'IP/Domain Name' field is empty. The 'Port' dropdown is set to 'NVR'. The 'Group name' dropdown is set to 'Device Group'. The 'User Name' field is set to 'admin'. The 'Password' field is empty. At the bottom are three buttons: 'Save and Continue', 'Add', and 'Cancel'.

Select the Type IPC

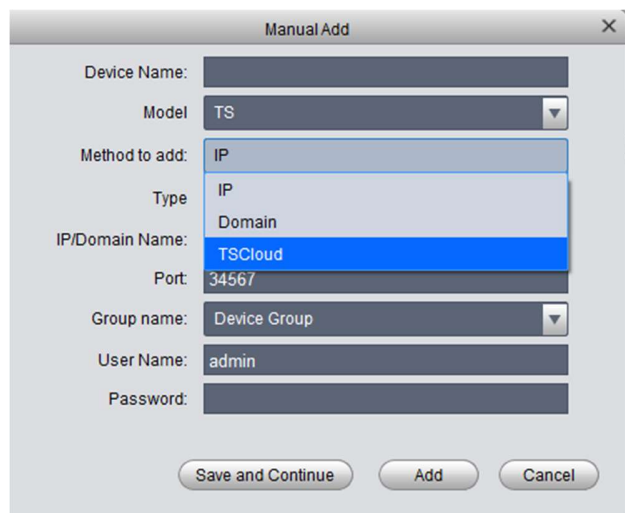

A screenshot of the same 'Manual Add' dialog box. The 'Type' dropdown is still open, but now 'IP' is selected instead of 'IPC'. The 'IP/Domain Name' field is now filled with 'TSCloud'. The 'Port' field is now filled with '34567'. All other fields and buttons remain the same as in the previous screenshot.


Select method TSCloud

Sahasra Electronics (Rwanda) Pvt. Ltd.

C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820

E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw

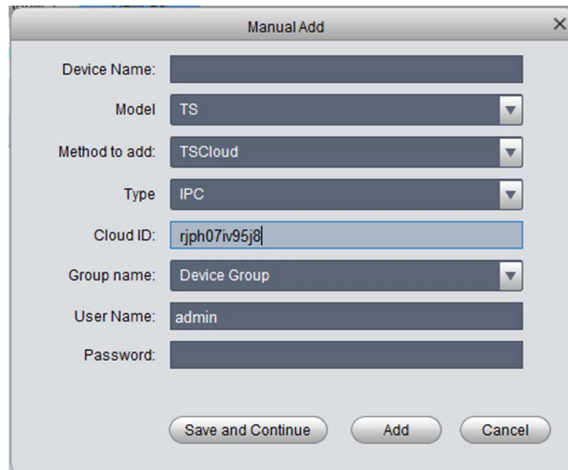

Manual Add

Device Name:

Model: TS

Method to add: TSCloud

Type: IPC

Cloud ID: rjph07iv95j8

Group name: Device Group

User Name: admin

Password:

Save and Continue Add Cancel

Enter id here that you noted.



Manual Add

Device Name: fr

Place input a Device Name.

Model: TS

Method to add: TSCloud

Type: IPC

Cloud ID: rjph07iv95j8


Group name: Device Group

User Name: admin

Password:


Save and Continue Add Cancel

Enter the Password

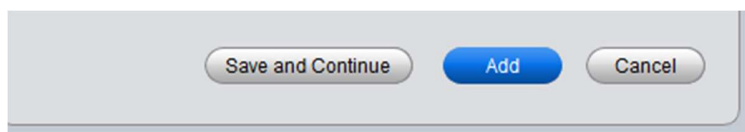

Save and Continue Add Cancel

Click on add

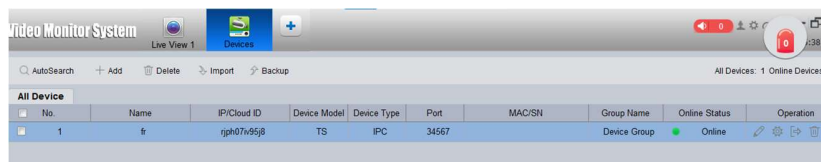

Video Monitor System

Live View 1 Devices

AutoSearch Add Delete Import Backup

All Devices: 1 Online Devices

All Device	No	Name	IP/Cloud ID	Device Model	Device Type	Port	MAC/SN	Group Name	Online Status	Operation
	1	fr	rjph07iv95j8	TS	IPC	34567		Device Group	Online	

Camera will come online

Go to the live video & double click on device id, & then you can see the live video.

Sahasra Electronics (Rwanda) Pvt. Ltd.

C-4, Masoro, Kigali Special Economic Zone, Gasabo District, Kigali, Rwanda

Ph. +250 786780893, +250 787396820

E-mail: contact@sahasraelectronics.rw | Web: www.sahasraelectronics.rw